


# TECHMIRE

die casting solutions

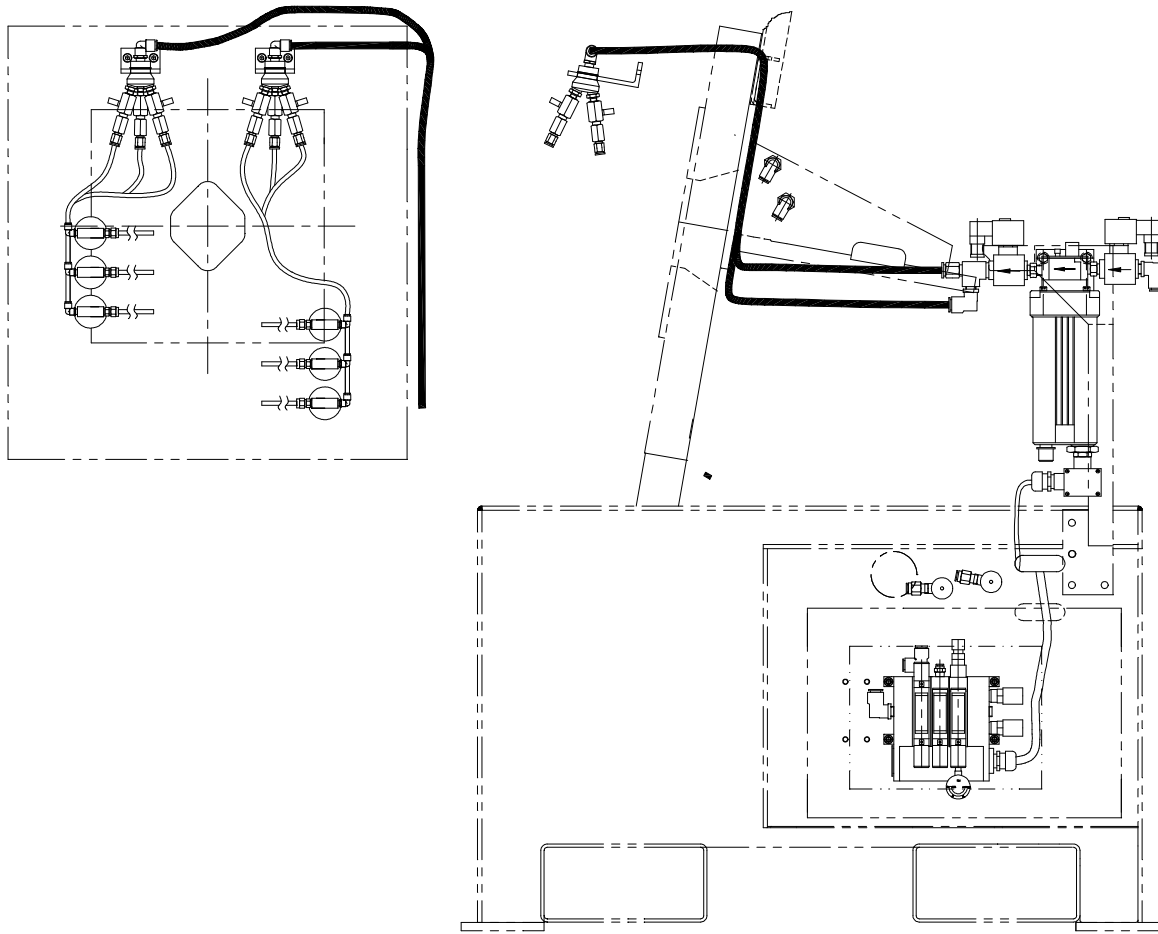

➤ LATEST MULTIPLE-SLIDE TECHNOLOGY

## FOR MODEL 22NT, 24NTX, 44NT, 66NT, 88NT, 1212NTX

- Mold Pressurized Lubrication System upgrade – lubricator bowl under pressure, 6 or 9 spray heads
  - Consistent amount of mold lubrication at every signal.
  - Very short spray time possible; as low as 20 milliseconds per pulse.
  - Suitable for built-in lube lines, stripper plates or regular mold surfaces.
  - Available with 1 or 5 liter reservoirs.
  - Added safety valve to stop flow under shut down situation.
  - Level detection system included in order to prevent the machine from operating without lubricant.
  - Comes standard with 6 outlet ports and upgradable up to 9 outlet ports.